



High Bay

Unilite Opto Technology LTD.

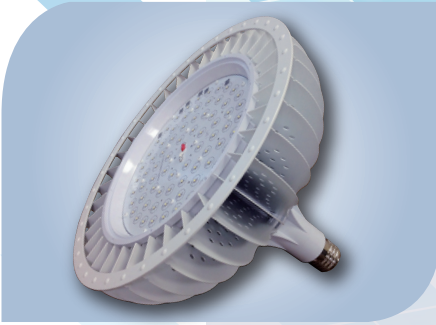

PN	Dimension	Socket	Lumen	Voltage	Wattage	Color Kelvin	View Angle	CRI	Weight(kg)	LED light Source	Power supply
U-AHBW-60-XX-XX-X	φ178mm*H218mm	E40/E39	5500lm	90-305V	60W	WW: 3000K NW: 4000K CW: 5000K	90° / 100° /120°	7: >70 8: >80	0.9	Nichia / Osram	Meanwell
U-AHBW-100-XX-XX-X	φ203mm*H260mm		8200lm		102W		60° / 100° /120°		1.2		
U-AHBW-120-XX-XX-X	φ240mm*H265mm		9500lm		120W		60° / 90° /100°		1.5		
U-AHBW-150-XX-XX-X	φ320mm*H282mm		13200lm		150W		60° / 90° /100°		2.1		
U-AHBW-180-XX-XX-X	φ320mm*H282mm		15000lm		180W		60° / 90° /120°		2.1		
U-AHBW-200-XX-XX-X	φ330mm*H270mm		18000lm		200W		60° / 90° /120°		2.1		

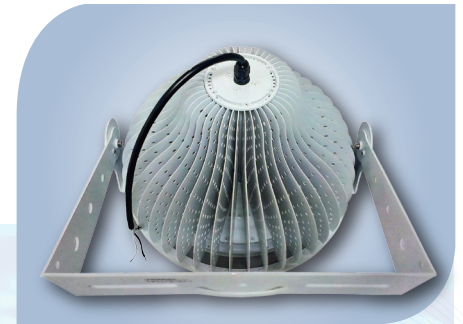

PN	Dimension (including Fixture)	Fixture	Lumen	Voltage	Wattage	Color Kelvin	View Angle	CRI	Weight (g)	LED light Source	Power supply
U-AHBW-100-XX-XX-X-A	φ203mm*H186mm	Metal	8200lm	90-305V	102W	WW: 3000K NW: 4000K CW: 5000K	60° / 100° /120°	7: >70 8: >80	1.7	Nichia / Osram	Meanwell
U-AHBW-120-XX-XX-X-A	φ240mm*H216mm		9500lm		120W		60° / 90° /100°		2.2		
U-AHBW-150-XX-XX-X-A	φ320mm*H210mm		13200lm		150W		60° / 90° /100°		3.4		
U-AHBW-180-XX-XX-X-A	φ320mm*H210mm		15000lm		180W		60° / 90° /120°		3.4		
U-AHBW-200-XX-XX-X-A	φ330mm*H400mm		18000lm		200W		60° / 90° /120°		4~4.2		

Downlight



Color Changing Interchangeably Available

Nature White, Warm White, Cold White

PN	Dimension	Lumen	Voltage	Wattage	Color Kelvin	CRI	LED Light Source	Color Changeable
U-AEDLW-007	φ110mm*H35mm	1260lm	85-240V	14W	3000K/4000K/6000K	>85	Nichia	Yes
U-AEDLW-007-WW		660lm		7W	3000K			
U-AEDLW-007-CW		600lm			6000K			