

Dimming Panel

Unilite Opto Technology LTD.



Super **Thin** Dimmable Panel Lighting, only 15mm Height

PN	Housing	Dimension	Lumen	Voltage	Wattage	Color Kelvin	Flux/ 1M	CRI	Remark
U-APAW-018-30-WW-D	Aluminum	30*30*1.5cm	>1100lm	85-240V	18W	3000K	>124lm	>85	Dimmable
U-APAW-018-30-NW-D						4000~4500K			
U-APAW-018-30-CW-D						5500K			



PN	Housing	Dimension	Lumen	Voltage	Wattage	Color Kelvin	Flux/ 1M	CRI	Remark
U-APAW-036-60-WW-D	Aluminum	60*60*1.5cm	>2604lm	85-240V	36W	3000K	>124lm	>85	Dimmable
U-APAW-036-60-NW-D						4000~4500K			
U-APAW-036-60-CW-D						5500K			





Dimmable RGB Panel

PN	Housing	Dimension	Lumen	Voltage	Wattage	Color	Flux/ 1M	CRI	Remark
U-APAF-018-30-D	Aluminum	30*30*1.5cm	>1100lm	85-240V	18W	RGB	>124lm	>85	Dimmable
U-APAF-036-60-D		60*60*1.5cm	>2604lm		36W				

LED components

PLCC 0.5W for Lighting solution solution
Easy to Design-IN
Long Life~High CRI ~ High Lumen ~ Low cost

PN	Color	Material	IF(mA)	Lumen	Voltage	View Angle
U-P3528W-05-XW	White	InGaN	150mA	55lm	3.0-3.4V	120°
U-P3528R-05	Red	AllnGaP		13lm	1.8-2.4V	
U-P3528G-05	Green	InGaN		24lm	3.0-3.4V	
U-P3528B-05	Blue	InGaN		8lm	3.0-3.4V	
U-P3528Y-05	Yellow	AllnGaP		13lm	1.8-2.4V	
U-P3528W-02-XW	White	InGaN	60mA	22lm	3.0-3.4V	

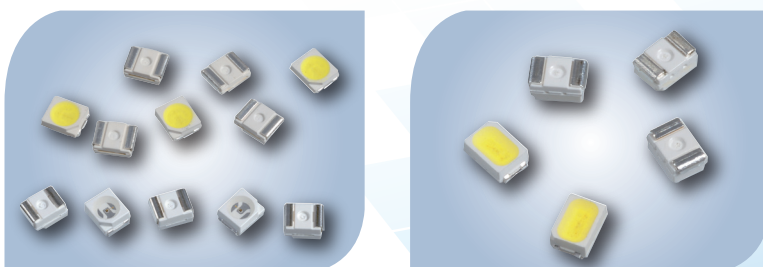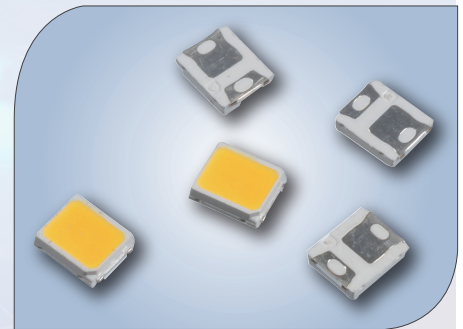

PLCC 2 Series

PN	Color	Material	IF(mA)	IV (mcd)	Voltage	View Angle
U-P3528W-XX	White	InGaN	20mA	>2300	3.0-3.4V	120°
U-P3014W-XX						
U-P3020W-XX						

Other part such like SMD, Right angle LED or Dip led, please contact with us.